




**Richpeace**

# Richpeace Multiple Heads Automatic Perforation and Sewing Machine

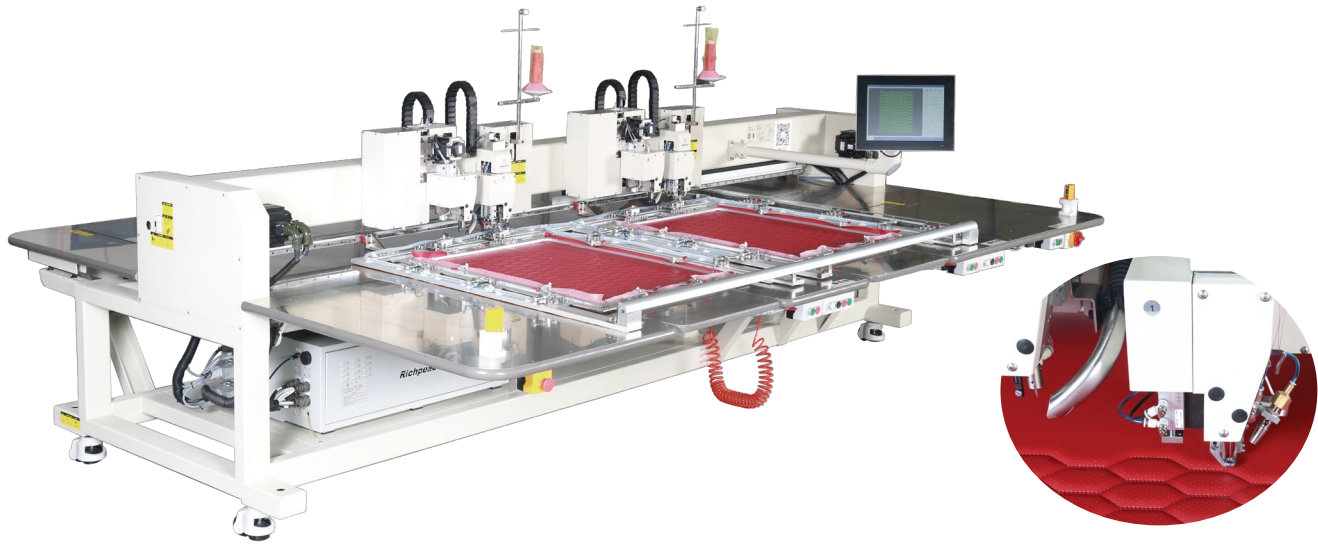


Model : RPAS-L-PS-2-600×900-B-IS2+SK-VR2-LH60, UTC-1P220V

## Features

1. Integrated perforation and sewing in one machine, punching out more pattern combinations.
2. Space between punching head and sewing head is only 200mm. Faster switching time between sewing and punching task, greatly improved production efficiency.
3. Sewing head and punching head lift up and down individually, ensure the actual working area. Also convenient for template opening and material reloading.
4. Selectable with single head, double head or multiple head models, multiple heads work at a time, multiplying the production efficiency.
5. Special aluminum frame leather fixture tools, easy to install, disassemble and leather replacement, convenient for mass production.
6. Adopt high-power industrial vacuum cleaner, good dust cleaning effect.
7. Equipped with Richpeace sewing CAD system software, arbitrary design of sewing patterns, easily realized special sewing process.

## Application

Suitable for car seat & its interior decoration, aviation seat, furniture upholstery, sports shoes, leather shoes and leather clothing, etc various leather products.

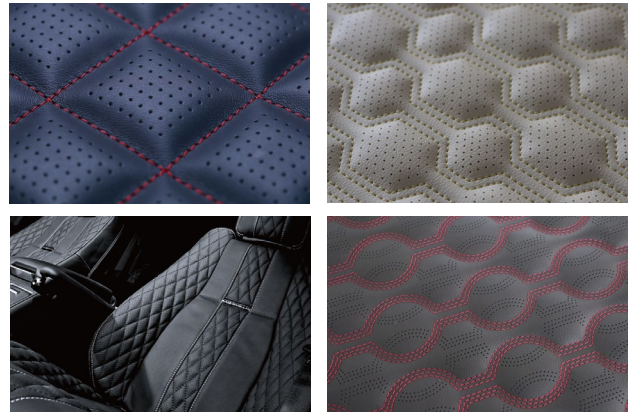

## Models

Recommended Models	Punching Head(s)	Sewing head(s)	Working Area
RPAS-L-PS-1-600×750-B-IS2+SK-VR2-LH60,UTC-1P220V	1	1	600mm×750mm
RPAS-L-PS-1-900×600-B-IS2+SK-VR2-LH60,UTC-1P220V	1	1	900mm×600mm
RPAS-L-PS-1-1200×800-B-IS2+SK-VR2-LH60,UTC-1P220V	1	1	1200mm×800mm
RPAS-L-PS-2-600×900-B-IS2+SK-VR2-LH60, UTC-1P220V	2	2	600mm×900mm
RPAS-L-PS-2-1200×800-B-IS2+SK-VR2-LH60, UTC-1P220V	2	2	1200mm×800mm

## Parameters

<b>Operation Panel</b>	15 inch Industrial Computer Control Screen	<b>Presser Foot Lifting Height</b>	12mm
<b>Max. Storage</b>	8G	<b>Head Lifting Height</b>	60mm
<b>Stitch Type</b>	Single Needle Lock Stitch	<b>Thread Trimming</b>	Pneumatic Trimming
<b>Sewing Speed</b>	Maximum Speed 2000 Stitches/min, Leather Sewing Recommended 800-1500 Stitches/min	<b>Pattern Reading Mode</b>	USB
<b>Punching speed</b>	Max. 800 Holes/min.	<b>Motor</b>	<b>Servo Motor</b>
<b>Stitch Length</b>	0.5-12.7mm	<b>Power Supply</b>	Single Phase 220V 50Hz
<b>Thread Size</b>	TICKET NO. #20 ~ #30	<b>Maximum Power</b>	Single Head 3.5KW, Double Head 5.5KW
<b>Material Clamping</b>	Pneumatic Clamp	<b>Air Pressure</b>	0.5-0.6Mpa

## Configuration




**Richpeace Control System**



**Special Leather Fixture Frame for Punching Machine**



**Pneumatic Lifting Platform**

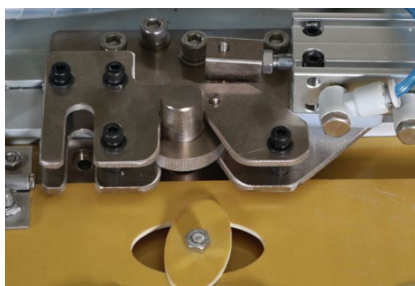

**Automatic Clamping and Framing Device**



**SMC Valve Island Bus**



**Industrial Powerful Vacuum Cleaner**

## TIANJIN RICHPEACE AI CO., LIMITED

Add: No.6 Baozhong Road,  
Baodi Economic Development Zone,  
Tianjin City, 301800 China

Tel: +86-22-22533456  
Fax: +86-22-22530075  
Email: sales@richpeace.com

